

AI DB-1602

18 outlets 30A audio power conditioner power sequence controller power sequencer with independent air switch USB



Product Description

- ▶ Panel color: iron black
- ▶ Power input conditions (single-phase 3-wire): AC90-260V 50-60HZ two-phase (three-wire: zero, fire, ground)
- ▶ Number of 3 channels: 16-ch universal socket relay controlled and 2-ch universal socket direct
- ▶ Relay controlled output maximum single power / total power (reactive power): 6000W / 15000W maximum reactive power
- ▶ Output power socket specifications: flame retardant ABS material, can bear 10A current phosphor copper material, standard American socket
- ▶ Features: 1. Turn on in sequence and turn off in reverse order 2. PASS key can turn on all channels at the same time 3. Precise voltage display 4. Leakage and overcurrent protection 5. Panel channels are independently closed 6. USB interface maximum output 5V / 500MA, can be connected to DJ light
- ▶ Interval / time of each switch: 1 second by default
- ▶ Output relay contact current: 30A 277VAC
- ▶ Circuit board specifications: double-sided fiberboard, secondary power supply wiring thickening and thickening
- ▶ Power supply specifications: built-in switching power supply, suitable for global voltage AC90-260V 50-60HZ 11 Main cable specifications: 3 * 4 square cable, total length is 1.5 meters (without power input plug)
- ▶ Open type: square boat type switch
- ▶ Single independent switch function: support independent control of panel
- ▶ Function display voltage display meter type: red digital tube display voltmeter
- ▶ Power purification function (EMI professional grid filter): None (optional with separate or each band filter)
- ▶ Short circuit overcurrent protection circuit breaker configuration: zero circuit breaker, live wire control, leakage current protection In 30MA / T≤0.1s, overcurrent protection, (63A short circuit protection)
- ▶ Body size: length 480MM * width 300MM * height 89MM (standard 2U) gross weight: 5.5KG
- ▶ Single machine package size: length 580MM * width 435MM * height 120MM (import kraft box or color printing box) 19 Overall weight and outer packaging size: 1 piece and 5 sets total 30KG, outer packaging size: length 590 * width 39 * height 190MM

SPECIFICATIONS

Product Name	power sequence controller	Model	AI DB-1602
panel color	black	USB interface Max. output	5V/500MA
power requirement	AC90-260V 50-60Hz	main cable	3*4 square
channel number	8	Gross Weight	5.5kg
Output relay contact current	30A 277V AC	Packing size (L*W*H)	58*44*12cm

Panel Description




2 way straight socket Voltage display Through switch air switch
 16 way indicator/no/off key switch



Power cable 16 way universal socket

Panel Description

- 01 Rack Mounting Ears
- 02 Direct Outlets
- 03 Display Screen
- 04 Power Output LED Indication
- 05 USB Output
- 06 Bypass Button
- 07 Air Power Switch
- 08 Power Switch
- 09 Power Output Connector
- 10 AC Power Cable

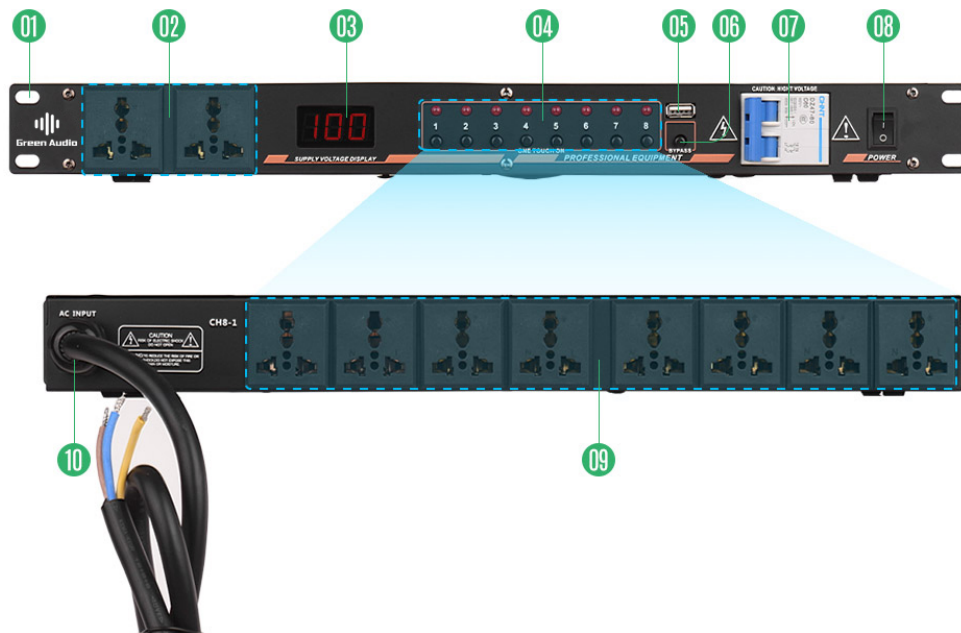

DIMENSIONS

