

AI GAX-DB03



**Professional 10-outlet power sequencer controller Conditioner
Surge Protector 40kA Power Supply Regulator LED Display**




Product Description

- ▶ Panel color: iron black
- ▶ Power input conditions (single-phase 3-wire): AC90-260V 50-60HZ two-phase (three-wire: zero, fire, ground)
- ▶ Number of 3 channels: 8-channel universal socket relay controlled and 2-channel universal socket direct output(TIS no. 166-2549) Standard
- ▶ Relay controlled output maximum withstand single power / total power (reactive power): 5000W / 8000W maximum withstand reactive power
- ▶ Output power socket specifications: flame retardant ABS material, up to 10A current brass material, standard universal socket
- ▶ Features Features: 1. Turn on in sequence and turn off in reverse order 2. PASS key can turn on all channels at the same time 3. Precise voltage display 4. Overcurrent protection 40 kA at 8/20 μ S ec 5. TOVs Surge Current 5A in 0.5 S ce 50 Hz 5A let through voltage < 275 Volt 6.The maximum output of the USB interface is 5V / 500MA and can be connected to LED AC load Current Max. 16A 7.TOVs Surge Current Counter 3 digits display
- ▶ Interval / time of each switch: 1 second by default
- ▶ Output relay contact current: 315VAC \pm 15% at current > 100 mA 50 Hz
- ▶ Circuit board specifications: double-sided fiberboard, secondary power supply wiring thickening and thickening
- ▶ Power supply specifications: built-in switching power supply, suitable for global voltage AC90-260V 50-60HZ
- ▶ Main cable specifications: 3 * 1.5mm square cable, length is 3.0 meter IEC standard
- ▶ Open type: square boat type switch
- ▶ Single independent switch function: support independent control of panel
- ▶ Function display Line voltage , Load current display meter type: red and green digital tube display voltmeter
- ▶ Power purification function (EMI professional grid filter): None (optional with separate or each band filter)
- ▶ Short circuit overcurrent protection circuit breaker configuration: circuit breaker zero noise filtering, live wire control, overcurrent protection,
- ▶ Body size: length 480MM * width 185MM * height 46MM (standard 1U 19")
- ▶ Stand-alone package size: length 555MM * width 255MM * height 85MM (American cattle cardboard box)
- ▶ Total weight and outer package size: 1 piece, 5 units, total 16KG, outer package size: length 257 * width 85 * height 555mm

Panel Description

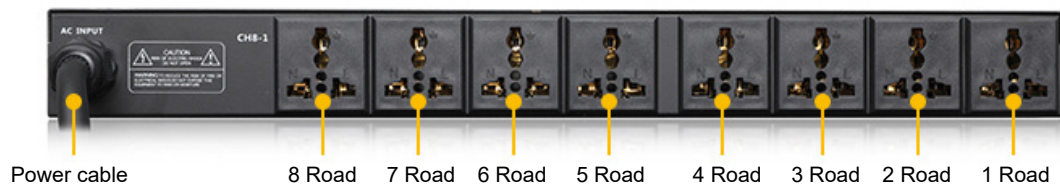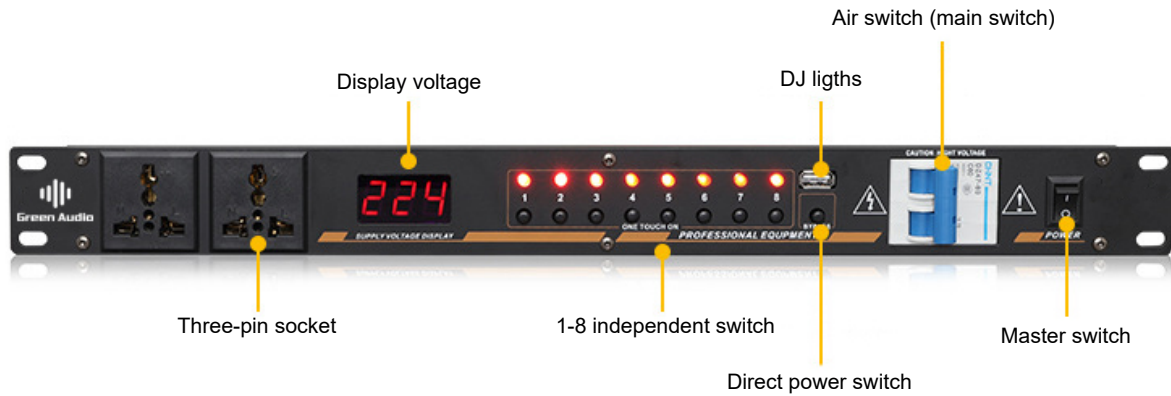


Direct-through switch, can control 8 channels at the same time turn on and off with one key. It needs to press 1-8 independent switches to take effect when using Direct-through switch

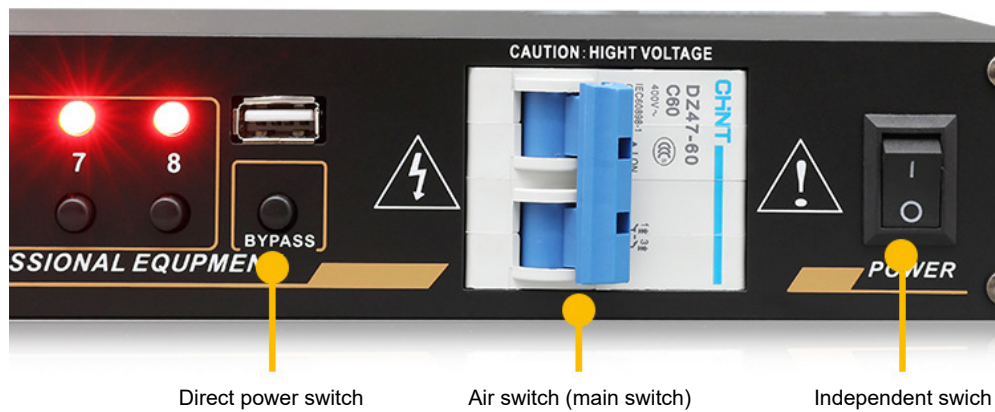

Panel Description

- 01 Rack Mounting Ears
- 02 Direct Outlets
- 03 Display Screen
- 04 Power Output LED Indication
- 05 USB Output
- 06 Bypass Button
- 07 Air Power Switch
- 08 Power Switch
- 09 Power Output Connector
- 10 AC Power Cable

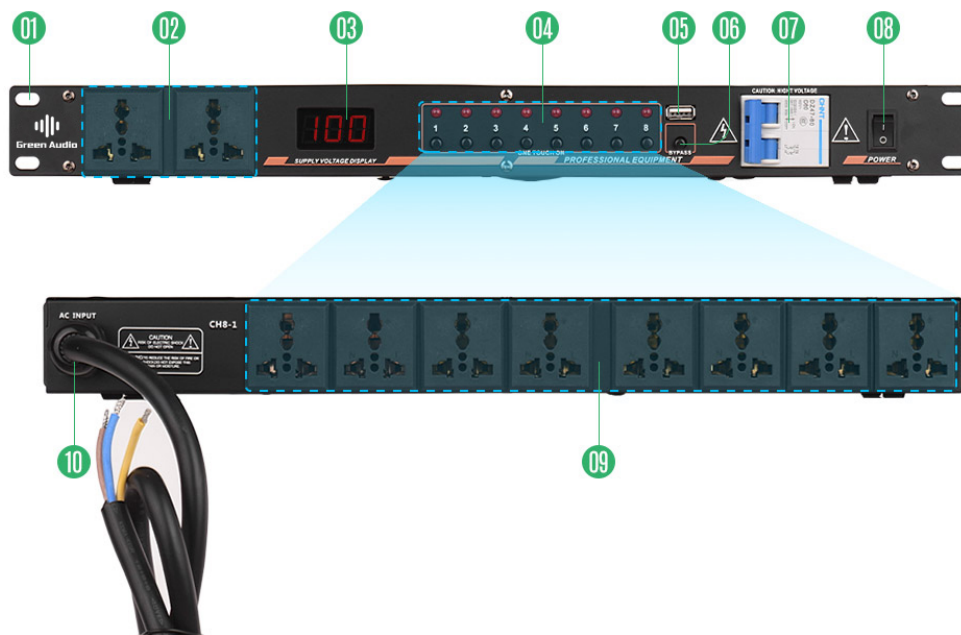

DIMENSIONS

