

# AI-HPC30


**IP POE Horn Speaker 30W ABS waterproof**



## Introduction

AI-HPC30 POE Horn Speaker 30W ABS waterproof weatherproof active speaker voice alarm IP PA System

Internet Explore Remote Control

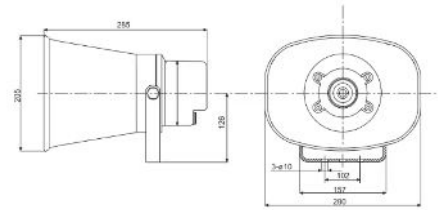

## KEYFEATURE

- ▶ Active speaker with network audio source build in.
- ▶ High performance ARM processor, can realize the excellent network audio transmission performance.
- ▶ B/S structure and can be managed via web browser.
- ▶ Advanced network structure design, support standalone running without server.
- ▶ Built-in 2\*20W 8Ω Amplifier.
- ▶ 12V~24V widely range power supply, POE optional.
- ▶ 4 Timing program schedule build in to do system control automatically
- ▶ Communication delay <50ms.
- ▶ Easy to do announcement via network from an MIP\_DARS or MIP\_TERS8.
- ▶ Signal to Noise Ratio
- ▶ Closed cabinet with exceptional acoustical qualities.
- ▶ Password protection, IP address filtering, Digest authentication, User access log, firewall
- ▶ Suitable for Outdoor use.

## SPECIFICATIONS

- ▶ Power Supply: DC12V~24V Wide Range.
- ▶ Rated power: 30W
- ▶ Dimensions WxHxD: 285\*205\*280mm
- ▶ Frequency response: 300-7500Hz
- ▶ SPL(Max sound pressure level ) 1W@1m: 107±2dB
- ▶ Code 48 kHz, MP3 , G.722 16 kHz, G.711 8 kHz, G.711 8 kHz
- ▶ Net Weight 2kg
- ▶ Operating Temperature -30°C ~ +60°C
- ▶ Network Interface: 100M Base network, RJ45 port, 1.5KV Electric isolation, with transmission data indicating.
- ▶ Network Protocol: SIP, ONVIF, HTTP, IPv4, DHCP, RTSP, RTP, RTCP, TCP, UDP, ARP, FTP, TFTP, NFS, NTP